


STEP-BY-STEP FITTING INSTRUCTIONS

1. Select a position for the chrome tap around the back edge of the sink ensuring that the spout can discharge into the sink. Check below chosen position for clearance. Drill $\frac{1}{2}$ " hole, install and secure chrome tap (see diagram B).
2. Push the $\frac{3}{8}$ " coupling firmly onto the tap.
3. Fix bracket to filter head using the screws supplied, checking the inlet and outlet are in the correct orientation.
4. Locate the filter housing vertically, mark position and secure with screws supplied. **Important:** Check that the screws supplied are not too long for your chosen location and will not break through the cupboard wall.

5. Turn off mains water and fit stop valve to the incoming mains water supply. Ensure the valve is in the closed position.

6. Cut the blue tube to the required length and connect the tube to the stop valve and inlet on cartridge head, then connect the second length to the tap and the outlet on the cartridge head. (See diagram C)

7. Open the chrome tap on the sink, then turn the stop valve to the open position. Flush at least 20 litres of water through the system before use.

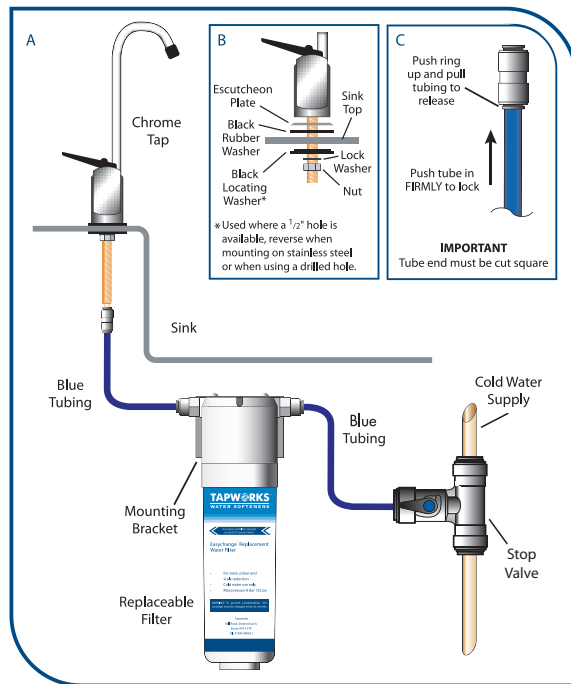

300111